

Serving Colorado – (Mailing Address)  
1301 Arapahoe St. #105  
Golden, CO 80401  
(303) 394-9181  
www.reservestudy.com



ASSOCIATION  
RESERVES™

Serving Utah  
159 Broadway Suite 200-147  
Salt Lake City, UT 84101  
(877) 344-8868  
www.reservestudy.com

*Planning For The Inevitable™*



## Greenspire Metro District #1 *Windsor, CO*



Report #: 56093-0  
Beginning: January 1, 2026  
Expires: December 31, 2026

# RESERVE STUDY

"Full"

September 16, 2025

# Welcome to your Reserve Study!

**A** Reserve Study is a valuable tool to help you budget responsibly for your property. This report contains all the information you need to avoid surprise expenses, make informed decisions, save money, and protect property values.

**R**egardless of the property type, it's a fact of life that the very moment construction is completed, every major building component begins a predictable process of physical deterioration. The operative word is "predictable" because planning for the inevitable is what a Reserve Study by **Association Reserves** is all about!

In this Report, you will find three key results:

- **Component List**

Unique to each property, the Component List serves as the foundation of the Reserve Study and details the scope and schedule of all necessary repairs & replacements.

- **Reserve Fund Strength**

A calculation that measures how well the Reserve Fund has kept pace with the property's physical deterioration.

- **Reserve Funding Plan**

A multi-year funding plan based on current Reserve Fund strength that allows for component repairs and replacements to be completed in a timely manner, with an emphasis on fairness and avoiding "catch-up" funding.

## Questions?

Please contact your Project Manager directly.



[www.reservestudy.com](http://www.reservestudy.com)

The logo used within this report is the registered trademark of Association Reserves, Inc., All rights reserved.

## Table of Contents

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>Executive Summary</b>                                             | <b>4</b>  |
| Executive Summary (Component List)                                   | 5         |
| <b>Introduction, Objectives, and Methodology</b>                     | <b>6</b>  |
| Which Physical Assets are Funded by Reserves?                        | 7         |
| How do we establish Useful Life and Remaining Useful Life estimates? | 7         |
| How do we establish Current Repair/Replacement Cost Estimates?       | 7         |
| How much Reserves are enough?                                        | 8         |
| How much should we transfer to Reserves?                             | 9         |
| What is our Recommended Funding Goal?                                | 9         |
| <b>Site Inspection Notes</b>                                         | <b>10</b> |
| <b>Projected Expenses</b>                                            | <b>11</b> |
| Annual Reserve Expenses Graph                                        | 11        |
| <b>Reserve Fund Status &amp; Recommended Funding Plan</b>            | <b>12</b> |
| Annual Reserve Funding Graph                                         | 12        |
| 30-Yr Cash Flow Graph                                                | 13        |
| Percent Funded Graph                                                 | 13        |
| <b>Table Descriptions</b>                                            | <b>14</b> |
| Reserve Component List Detail                                        | 15        |
| Fully Funded Balance                                                 | 16        |
| Component Significance                                               | 17        |
| 30-Year Reserve Plan Summary                                         | 18        |
| 30-Year Income/Expense Detail                                        | 19        |
| <b>Accuracy, Limitations, and Disclosures</b>                        | <b>25</b> |
| <b>Terms and Definitions</b>                                         | <b>26</b> |
| <b>Component Details</b>                                             | <b>27</b> |
| Sites and Grounds                                                    | 28        |
| Mechanical                                                           | 45        |

**Greenspire Metro District #1 -**

Windsor, CO


Level of Service: "Full"

Report #: **56093-0**

# of Units: 1

**January 1, 2026 through December 31, 2026****Findings & Recommendations****as of January 1, 2026**

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| Starting Reserve Balance                                               | \$0       |
| Fully Funded Reserve Balance                                           | \$497,511 |
| Annual Rate (Cost) of Deterioration                                    | \$114,493 |
| Percent Funded                                                         | 0.0 %     |
| Recommended 2026 Annual "Fully Funding" Reserve Transfers              | \$142,000 |
| Alternate/Baseline Annual Minimum Transfers to Keep Reserves Above \$0 | \$125,000 |
| Recommended 2026 Special Assessments for Reserves                      | \$0       |
| Most Recent Annual Reserve Transfer Rate                               | \$0       |

**Reserve Fund Strength: 0.0%****Risk of Special Assessment:****Economic Assumptions:**Net Annual "After Tax" Interest Earnings Accruing to Reserves ..... **1.50 %**Annual Inflation Rate ..... **3.00 %**

- This "Full", (original, created "from scratch"), is based on our site inspection on 8/25/2025.
- The Reserve Study was reviewed by a credentialed Reserve Specialist (RS).
- Your Reserve Fund is currently 0.0 % Funded. This means the client's special assessment & deferred maintenance risk is currently High.
- Based on this starting point and your anticipated future expenses, our recommendation is to budget the Annual Reserve transfers at \$142,000 with 3% annual increases in order to be within the 70% to 130% level as noted above. 100% "Full" transfer rates are designed to achieve these funding objectives by the end of our 30-year report scope.
- The goal of the Reserve Study is to help the client offset the inevitable annual deterioration of the common area components. The Reserve Study will guide the client to establish an appropriate Reserve transfer rate that offsets the annual deterioration of the components and 'keeps pace' with the rate of ongoing deterioration. No assets appropriate for Reserve designation were excluded. See the appendix for component details; the basis of our assumptions.
- We recommend that this Reserve Study be updated annually, with a With-Site-Visit Reserve Study every three years. Clients that update their Reserve Study annually with a No-Site-Visit Reserve Study reduce their risk of special assessment by ~ 35%.
- Please watch this 5-minute video to understand the key results of a Reserve Study - <https://youtu.be/l5B24oNLTYy>

| # Component                                    | Useful Life<br>(yrs) | Rem.<br>Useful Life<br>(yrs) | Current<br>Average<br>Cost |
|------------------------------------------------|----------------------|------------------------------|----------------------------|
| <b>Sites and Grounds</b>                       |                      |                              |                            |
| 21050 Driveway Concrete - Replace - 5%         | 5                    | 3                            | \$100,625                  |
| 21090 Concrete Walkways - Replace - 5%         | 5                    | 3                            | \$43,638                   |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | 5                    | 0                            | \$30,738                   |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | 5                    | 0                            | \$73,600                   |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | 5                    | 2                            | \$34,400                   |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | 5                    | 3                            | \$12,800                   |
| 21330 Site Fence: Wood 2-Rail - Replace        | 30                   | 6                            | \$11,252                   |
| 21331 Site Fence: Wood 3-Rail - Replace        | 30                   | 25                           | \$201,066                  |
| 21332 Site Fence: Wood Privacy- Replace (2021) | 25                   | 20                           | \$587,972                  |
| 21333 Site Fence: Wood Privacy- Replace (2023) | 25                   | 22                           | \$274,813                  |
| 21334 Site Fence: Wood Privacy- Replace (2024) | 25                   | 23                           | \$102,256                  |
| 21340 Site Fence: Composite 2-Rail - Replace   | 30                   | 16                           | \$108,243                  |
| 21600 Mailbox Kiosks - Replace (2015)          | 30                   | 19                           | \$48,000                   |
| 21601 Mailbox Kiosks - Replace (2021)          | 30                   | 25                           | \$30,000                   |
| 21602 Mailbox Kiosks - Replace (2023)          | 30                   | 27                           | \$18,000                   |
| 21610 Signs/Monuments - Refurbish              | 30                   | 6                            | \$30,000                   |
| 21690 Site Furnishings - Replace               | 30                   | 25                           | \$18,000                   |
| 23600 Gazebo Roof – Replace                    | 30                   | 25                           | \$7,375                    |
| 23601 Mailbox Roof – Replace (2015)            | 30                   | 19                           | \$1,500                    |
| 23602 Mailbox Roof – Replace (2021)            | 30                   | 25                           | \$1,500                    |
| <b>Mechanical</b>                              |                      |                              |                            |
| 25570 Irrigation Clocks - Replace              | 15                   | 10                           | \$13,500                   |

**21 Total Funded Components**

## Introduction



A Reserve Study is the art and science of anticipating, and preparing for, an association's major common area repair and replacement expenses. Partially art, because in this field we are making projections about the future. Partially science, because our work is a combination of research and well-defined computations, following consistent National Reserve Study Standard principles.

The foundation of this and every Reserve Study is your Reserve Component List (what you are reserving for). This is because the Reserve Component List defines the *scope and schedule* of all your anticipated upcoming Reserve projects. Based on that List and your starting balance, we calculate the association's Reserve Fund Strength (reported in terms of "Percent Funded"). Then we compute a Reserve Funding Plan to provide for the Reserve needs of the association. These form the three results of your Reserve Study.



Reserve funding is not "for the future". Ongoing Reserve transfers are intended to offset the ongoing, daily deterioration of your Reserve assets. Done well, a stable, budgeted Reserve Funding Plan will collect sufficient funds from the owners who enjoyed the use of those assets, so the association is financially prepared for the irregular expenditures scattered through future years when those projects eventually require replacement.

## Methodology




For this [Full Reserve Study](#), we started with a review of your Governing Documents, recent Reserve expenditures, an evaluation of how expenditures are handled (ongoing maintenance vs Reserves), and research into any well-established association precedents. We

performed an on-site inspection to quantify and evaluate your common areas, creating your Reserve Component List *from scratch*.

## *Which Physical Assets are Funded by Reserves?*

There is a national-standard three-part test to determine which projects should appear in a Reserve Component List. First, it must be a common area maintenance obligation. Second, both the need and schedule of a component's project can be reasonably anticipated. Third, the project's total cost is material to the client, can be reasonably anticipated, and includes all direct and related costs. A project cost is commonly considered *material* if it is more than 0.5% to 1% of the total annual budget. This limits Reserve components to major, predictable expenses. Within this framework, it is inappropriate to include *lifetime* components, unpredictable expenses (such as damage due to natural disasters and/or insurable events), and expenses more appropriately handled from the Operational budget.

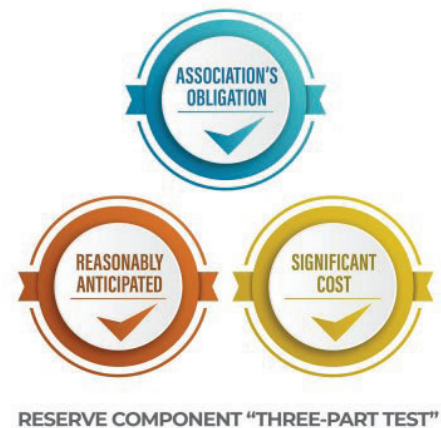

## *How do we establish Useful Life and Remaining Useful Life estimates?*

- 1) Visual Inspection (observed wear and age)
- 2) Association Reserves database of experience
- 3) Client History (install dates & previous life cycle information)
- 4) Vendor Evaluation and Recommendation

## *How do we establish Current Repair/Replacement Cost Estimates?*

In this order...

- 1) Actual client cost history, or current proposals
- 2) Comparison to Association Reserves database of work done at similar associations
- 3) Vendor Recommendations
- 4) Reliable National Industry cost estimating guidebooks

## How much Reserves are enough?

Reserve adequacy is not measured in cash terms. Reserve adequacy is found when the *amount* of current Reserve cash is compared to Reserve component deterioration (the *needs of the association*). Having *enough* means the association can execute its projects in a timely manner with existing Reserve funds. Not having *enough* typically creates deferred maintenance or special assessments.

Adequacy is measured in a two-step process:

- 1) Calculate the *value of deterioration* at the association (called Fully Funded Balance, or FFB).
- 2) Compare that to the Reserve Fund Balance, and express as a percentage.



Each year, the *value of deterioration* at the association changes. When there is more deterioration (as components approach the time they need to be replaced), there should be more cash to offset that deterioration and prepare for the expenditure. Conversely, the *value of deterioration* shrinks after projects are accomplished. The *value of deterioration* (the FFB) changes each year, and is a moving but predictable target.

There is a high risk of special assessments and deferred maintenance when the Percent Funded is *weak*, below 30%. Approximately 30% of all associations are in this high risk range. While the 100% point is Ideal (indicating Reserve cash is equal to the *value of deterioration*), a Reserve Fund in the 70% - 130% range is considered strong (low risk of special assessment).

Measuring your Reserves by Percent Funded tells how well prepared your association is for upcoming Reserve expenses. New buyers should be very aware of this important disclosure!

## How much should we transfer to Reserves?



According to National Reserve Study Standards, there are four Funding Principles to balance in developing your Reserve Funding Plan. Our first objective is to design a plan that provides you with sufficient cash to perform your Reserve projects on time. Second, a stable rate of ongoing Reserve transfers is desirable because it keeps these naturally irregular expenses from unsettling the budget.

Reserve transfers that are evenly distributed over current and future owners enable each owner to pay their fair share of the association's Reserve expenses over the years. And finally, we develop a plan that is fiscally responsible and safe for Board members to recommend to their association. Remember, it is the Board's job to provide for the ongoing care of the common areas. Board members invite liability exposure when Reserve transfers are inadequate to offset ongoing common area deterioration.

## What is our Recommended Funding Goal?

Maintaining the Reserve Fund at a level equal to the *value* of deterioration is called "Full Funding" (100% Funded). As each asset ages and becomes "used up," the Reserve Fund grows proportionally. **This is simple, responsible, and our recommendation.** Evidence shows that associations in the 70 - 130% range *enjoy a low risk of special assessments or deferred maintenance.*



Allowing the Reserves to fall close to zero, but not below zero, is called Baseline Funding. Doing so allows the Reserve Fund to drop into the 0 - 30% range, where there is a high risk of special assessments & deferred maintenance. Since Baseline Funding still provides for the timely execution of all Reserve projects, and only the "margin of safety" is different, recommended Reserve transfers for Baseline Funding average only 10% to 15% less than Full Funding recommendations. Threshold Funding is the title of all other Cash or Percent Funded objectives *between* Baseline Funding and Full Funding.

**Site Inspection Notes**

During our site visit on 8/25/2025 we visually inspected the common area assets and were able to see a majority of the common areas. Please see photo appendix for component details; the basis of our assumptions.



Projected Expenses

While this Reserve Study looks forward 30 years, we have no expectation that all these expenses will all take place as anticipated. This Reserve Study needs to be updated annually because we expect the timing of these expenses to shift and the size of these expenses to change. We do feel more certain of the timing and cost of near-term expenses than expenses many years away. Please be aware of your near-term expenses, which we are able to project more accurately than the more distant projections. The figure below summarizes the projected future expenses as defined by your Reserve Component List. A summary of these expenses are shown in the 30-Year Reserve Plan Summary Table, while details of the projects that make up these expenses are shown in the 30-Year Income/Expense Detail.

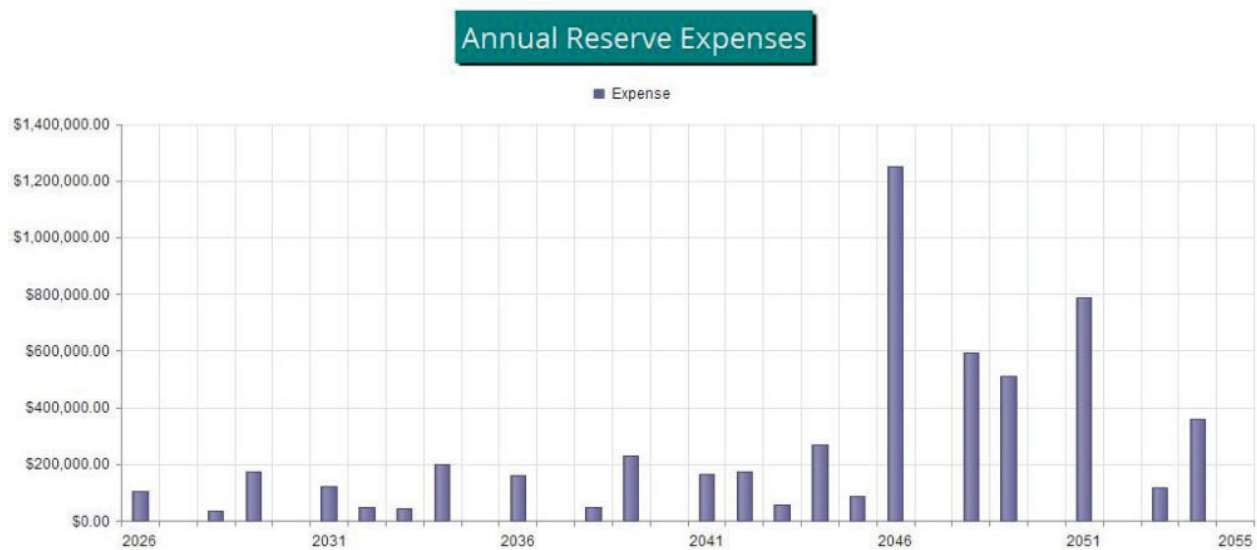


Figure 1

Reserve Fund Status

As of 1/1/2026 your Reserve Fund balance is projected to be \$0 and your Fully Funded Balance is computed to be \$497,511 (see the Fully Funded Balance Table). The Fully Funded Balance represents the deteriorated value of your common area components. Comparing your Reserve Balance to your Fully Funded Balance indicates your Reserves are 0.0 % Funded.

Recommended Funding Plan

Based on your current Percent Funded and your near-term and long-term Reserve needs, we are recommending Annual budgeted transfers of \$142,000. The overall 30-Year Plan, in perspective, is shown below in the Annual Reserve Funding (Fig. 2). This same information is shown numerically in both the 30-Year Reserve Plan Summary Table and the 30-Year Income/Expense Detail.

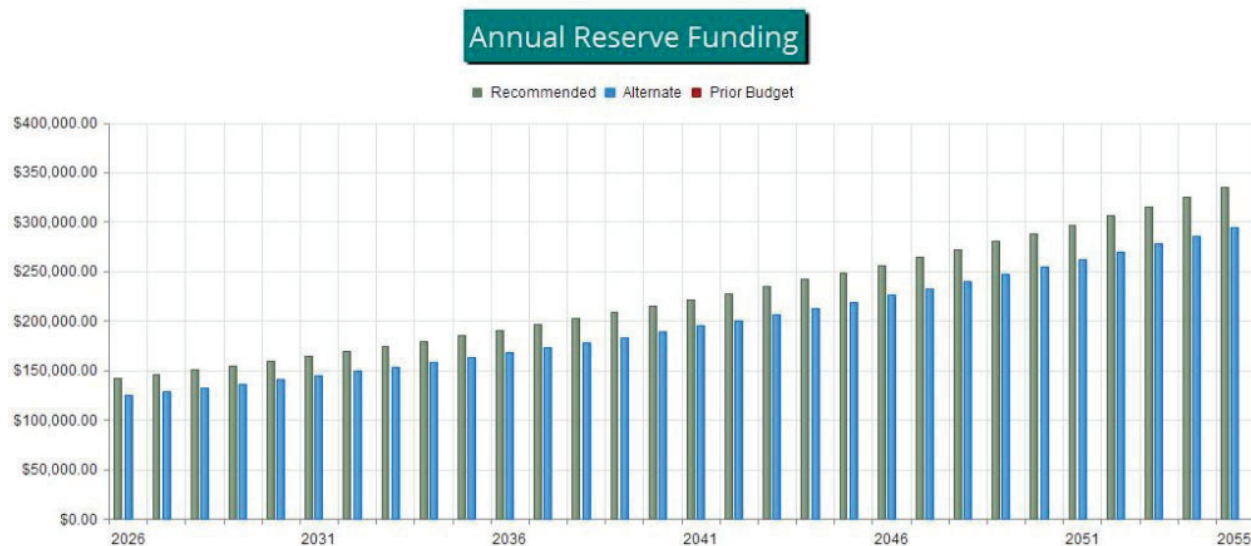


Figure 2

The reserve balance under our recommended Full Funding Plan, an alternate Baseline Funding Plan, and at your current budgeted transfer rate, compared to your always—changing Fully Funded Balance target is shown in the 30-Yr Cash Flow (Fig. 3).

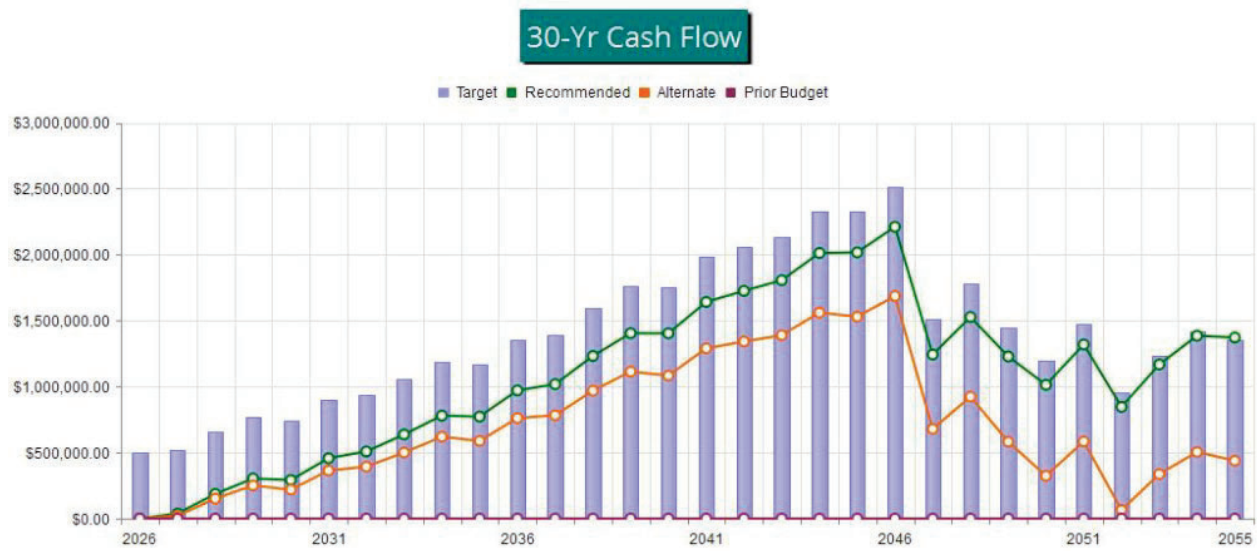


Figure 3

The information from Figure 3 is plotted on a Percent Funded scale in Figure 4. It is clear here to see how your Reserve Fund strength approaches the 100% Funded level under our recommended multi-yr Funding Plan. A client that has a percent funded level of <30% may experience an ~ 20%-60% chance risk of special assessment. A client that is between 30% and 70% may experience an ~ 20%-5% chance risk of special assessment. A client that has a percent funded of >70% may experience an ~ <1% chance risk of special assessment.

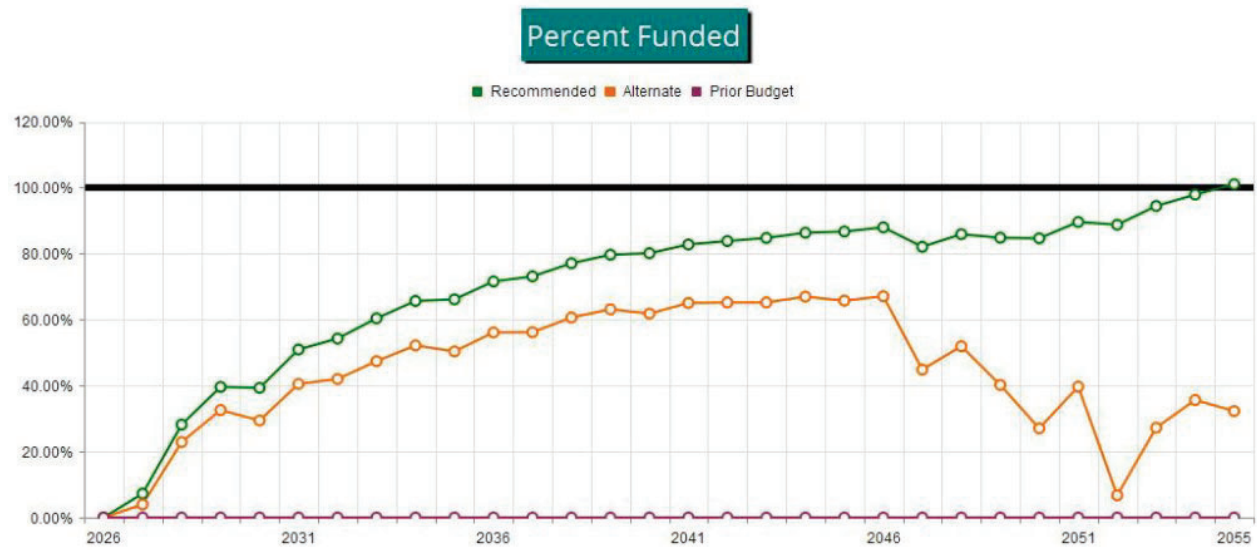


Figure 4



## Table Descriptions

Executive Summary is a summary of your Reserve Components

Reserve Component List Detail discloses key Component information, providing the foundation upon which the financial analysis is performed.

Fully Funded Balance shows the calculation of the Fully Funded Balance for each of your components, and their specific proportion related to the property total. For each component, the Fully Funded Balance is the fraction of life used up multiplied by its estimated Current Replacement Cost.

Component Significance shows the relative significance of each component to Reserve funding needs of the property, helping you see which components have more (or less) influence than others on your total Reserve funding requirements. The deterioration cost/yr of each component is calculated by dividing the estimated Current Replacement Cost by its Useful Life, then that component's percentage of the total is displayed.

30-Yr Reserve Plan Summary provides a one-page 30-year summary of the cash flowing into and out of the Reserve Fund, with a display of the Fully Funded Balance, Percent Funded, and special assessment risk at the beginning of each year.

30-Year Income/Expense Detail shows the detailed income and expenses for each of the next 30 years. This table makes it possible to see which components are projected to require repair or replacement in a particular year, and the size of those individual expenses.

| #                 | Component                                | Approx  | Quantity    | Useful Life | Rem.<br>Useful Life | Current Cost Estimate |                 |
|-------------------|------------------------------------------|---------|-------------|-------------|---------------------|-----------------------|-----------------|
|                   |                                          |         |             |             |                     | Lower Estimate        | Higher Estimate |
| Sites and Grounds |                                          |         |             |             |                     |                       |                 |
| 21050             | Driveway Concrete - Replace - 5%         | 115,000 | GSF         | 5           | 3                   | \$90,600              | \$111,000       |
| 21090             | Concrete Walkways - Replace - 5%         | 49,900  | GSF         | 5           | 3                   | \$39,300              | \$48,000        |
| 21320             | Site Fence: Wood 3-Rail - Repair/Paint   | 4,700   | LF          | 5           | 0                   | \$27,700              | \$33,800        |
| 21321             | Fence: Wood Privacy- Repair/Paint (2021) | 9,200   | LF          | 5           | 0                   | \$66,200              | \$81,000        |
| 21322             | Fence: Wood Privacy- Repair/Paint (2023) | 4,300   | LF          | 5           | 2                   | \$31,000              | \$37,800        |
| 21323             | Fence: Wood Privacy- Repair/Paint (2024) | 1,600   | LF          | 5           | 3                   | \$11,500              | \$14,100        |
| 21330             | Site Fence: Wood 2-Rail - Replace        | 370     | LF          | 30          | 6                   | \$10,100              | \$12,400        |
| 21331             | Site Fence: Wood 3-Rail - Replace        | 4,700   | LF          | 30          | 25                  | \$181,000             | \$221,000       |
| 21332             | Site Fence: Wood Privacy- Replace (2021) | 9,200   | LF          | 25          | 20                  | \$529,000             | \$647,000       |
| 21333             | Site Fence: Wood Privacy- Replace (2023) | 4,300   | LF          | 25          | 22                  | \$247,000             | \$302,000       |
| 21334             | Site Fence: Wood Privacy- Replace (2024) | 1,600   | LF          | 25          | 23                  | \$92,000              | \$112,000       |
| 21340             | Site Fence: Composite 2-Rail - Replace   | 2,700   | LF          | 30          | 16                  | \$97,400              | \$119,000       |
| 21600             | Mailbox Kiosks - Replace (2015)          | 16      | CBUs        | 30          | 19                  | \$43,200              | \$52,800        |
| 21601             | Mailbox Kiosks - Replace (2021)          | 10      | CBUs        | 30          | 25                  | \$27,000              | \$33,000        |
| 21602             | Mailbox Kiosks - Replace (2023)          | 6       | CBUs        | 30          | 27                  | \$16,200              | \$19,800        |
| 21610             | Signs/Monuments - Refurbish              | 3       | Monuments   | 30          | 6                   | \$27,000              | \$33,000        |
| 21690             | Site Furnishings - Replace               | 7       | Pieces      | 30          | 25                  | \$16,200              | \$19,800        |
| 23600             | Gazebo Roof – Replace                    | 590     | GSF         | 30          | 25                  | \$6,640               | \$8,110         |
| 23601             | Mailbox Roof – Replace (2015)            | 120     | GSF         | 30          | 19                  | \$1,350               | \$1,650         |
| 23602             | Mailbox Roof – Replace (2021)            | 120     | GSF         | 30          | 25                  | \$1,350               | \$1,650         |
| Mechanical        |                                          |         |             |             |                     |                       |                 |
| 25570             | Irrigation Clocks - Replace              | 27      | Controllers | 15          | 10                  | \$12,200              | \$14,800        |
| 21                | Total Funded Components                  |         |             |             |                     |                       |                 |



| #                 | Component                                | Current Cost Estimate | X | Effective Age | / | Useful Life | = | Fully Funded Balance |
|-------------------|------------------------------------------|-----------------------|---|---------------|---|-------------|---|----------------------|
| Sites and Grounds |                                          |                       |   |               |   |             |   |                      |
| 21050             | Driveway Concrete - Replace - 5%         | \$100,625             | X | 2             | / | 5           | = | \$40,250             |
| 21090             | Concrete Walkways - Replace - 5%         | \$43,638              | X | 2             | / | 5           | = | \$17,455             |
| 21320             | Site Fence: Wood 3-Rail - Repair/Paint   | \$30,738              | X | 5             | / | 5           | = | \$30,738             |
| 21321             | Fence: Wood Privacy- Repair/Paint (2021) | \$73,600              | X | 5             | / | 5           | = | \$73,600             |
| 21322             | Fence: Wood Privacy- Repair/Paint (2023) | \$34,400              | X | 3             | / | 5           | = | \$20,640             |
| 21323             | Fence: Wood Privacy- Repair/Paint (2024) | \$12,800              | X | 2             | / | 5           | = | \$5,120              |
| 21330             | Site Fence: Wood 2-Rail - Replace        | \$11,252              | X | 24            | / | 30          | = | \$9,002              |
| 21331             | Site Fence: Wood 3-Rail - Replace        | \$201,066             | X | 5             | / | 30          | = | \$33,511             |
| 21332             | Site Fence: Wood Privacy- Replace (2021) | \$587,972             | X | 5             | / | 25          | = | \$117,594            |
| 21333             | Site Fence: Wood Privacy- Replace (2023) | \$274,813             | X | 3             | / | 25          | = | \$32,978             |
| 21334             | Site Fence: Wood Privacy- Replace (2024) | \$102,256             | X | 2             | / | 25          | = | \$8,180              |
| 21340             | Site Fence: Composite 2-Rail - Replace   | \$108,243             | X | 14            | / | 30          | = | \$50,513             |
| 21600             | Mailbox Kiosks - Replace (2015)          | \$48,000              | X | 11            | / | 30          | = | \$17,600             |
| 21601             | Mailbox Kiosks - Replace (2021)          | \$30,000              | X | 5             | / | 30          | = | \$5,000              |
| 21602             | Mailbox Kiosks - Replace (2023)          | \$18,000              | X | 3             | / | 30          | = | \$1,800              |
| 21610             | Signs/Monuments - Refurbish              | \$30,000              | X | 24            | / | 30          | = | \$24,000             |
| 21690             | Site Furnishings - Replace               | \$18,000              | X | 5             | / | 30          | = | \$3,000              |
| 23600             | Gazebo Roof – Replace                    | \$7,375               | X | 5             | / | 30          | = | \$1,229              |
| 23601             | Mailbox Roof – Replace (2015)            | \$1,500               | X | 11            | / | 30          | = | \$550                |
| 23602             | Mailbox Roof – Replace (2021)            | \$1,500               | X | 5             | / | 30          | = | \$250                |
| Mechanical        |                                          |                       |   |               |   |             |   |                      |
| 25570             | Irrigation Clocks - Replace              | \$13,500              | X | 5             | / | 15          | = | \$4,500              |
|                   |                                          |                       |   |               |   |             |   | \$497,511            |



| #                 | Component                                | Useful Life (yrs) | Current Cost Estimate | Deterioration Cost/Yr | Deterioration Significance |
|-------------------|------------------------------------------|-------------------|-----------------------|-----------------------|----------------------------|
| Sites and Grounds |                                          |                   |                       |                       |                            |
| 21050             | Driveway Concrete - Replace - 5%         | 5                 | \$100,625             | \$20,125              | 17.58 %                    |
| 21090             | Concrete Walkways - Replace - 5%         | 5                 | \$43,638              | \$8,728               | 7.62 %                     |
| 21320             | Site Fence: Wood 3-Rail - Repair/Paint   | 5                 | \$30,738              | \$6,148               | 5.37 %                     |
| 21321             | Fence: Wood Privacy- Repair/Paint (2021) | 5                 | \$73,600              | \$14,720              | 12.86 %                    |
| 21322             | Fence: Wood Privacy- Repair/Paint (2023) | 5                 | \$34,400              | \$6,880               | 6.01 %                     |
| 21323             | Fence: Wood Privacy- Repair/Paint (2024) | 5                 | \$12,800              | \$2,560               | 2.24 %                     |
| 21330             | Site Fence: Wood 2-Rail - Replace        | 30                | \$11,252              | \$375                 | 0.33 %                     |
| 21331             | Site Fence: Wood 3-Rail - Replace        | 30                | \$201,066             | \$6,702               | 5.85 %                     |
| 21332             | Site Fence: Wood Privacy- Replace (2021) | 25                | \$587,972             | \$23,519              | 20.54 %                    |
| 21333             | Site Fence: Wood Privacy- Replace (2023) | 25                | \$274,813             | \$10,993              | 9.60 %                     |
| 21334             | Site Fence: Wood Privacy- Replace (2024) | 25                | \$102,256             | \$4,090               | 3.57 %                     |
| 21340             | Site Fence: Composite 2-Rail - Replace   | 30                | \$108,243             | \$3,608               | 3.15 %                     |
| 21600             | Mailbox Kiosks - Replace (2015)          | 30                | \$48,000              | \$1,600               | 1.40 %                     |
| 21601             | Mailbox Kiosks - Replace (2021)          | 30                | \$30,000              | \$1,000               | 0.87 %                     |
| 21602             | Mailbox Kiosks - Replace (2023)          | 30                | \$18,000              | \$600                 | 0.52 %                     |
| 21610             | Signs/Monuments - Refurbish              | 30                | \$30,000              | \$1,000               | 0.87 %                     |
| 21690             | Site Furnishings - Replace               | 30                | \$18,000              | \$600                 | 0.52 %                     |
| 23600             | Gazebo Roof – Replace                    | 30                | \$7,375               | \$246                 | 0.21 %                     |
| 23601             | Mailbox Roof – Replace (2015)            | 30                | \$1,500               | \$50                  | 0.04 %                     |
| 23602             | Mailbox Roof – Replace (2021)            | 30                | \$1,500               | \$50                  | 0.04 %                     |
| Mechanical        |                                          |                   |                       |                       |                            |
| 25570             | Irrigation Clocks - Replace              | 15                | \$13,500              | \$900                 | 0.79 %                     |
| 21                | Total Funded Components                  |                   |                       | \$114,493             | 100.00 %                   |



## 30-Year Reserve Plan Summary

Report # 56093-0  
Full

Fiscal Year Start: 2026

Net After Tax Interest:

1.50 %

Avg 30-Yr Inflation:

3.00 %

Reserve Fund Strength: as-of Fiscal Year Start Date

Projected Reserve Balance Changes

| % Increase |                                |                            |                   |                          |                                 |                    |                              |                    |                     |
|------------|--------------------------------|----------------------------|-------------------|--------------------------|---------------------------------|--------------------|------------------------------|--------------------|---------------------|
| Year       | Starting<br>Reserve<br>Balance | Fully<br>Funded<br>Balance | Percent<br>Funded | Special<br>Assmt<br>Risk | In Annual<br>Reserve<br>Funding | Reserve<br>Funding | Loan or<br>Special<br>Assmts | Interest<br>Income | Reserve<br>Expenses |
| 2026       | \$0                            | \$497,511                  | 0.0 %             | High                     | 0.00 %                          | \$142,000          | \$0                          | \$284              | \$104,338           |
| 2027       | \$37,946                       | \$522,896                  | 7.3 %             | High                     | 3.00 %                          | \$146,260          | \$0                          | \$1,678            | \$0                 |
| 2028       | \$185,884                      | \$660,048                  | 28.2 %            | High                     | 3.00 %                          | \$150,648          | \$0                          | \$3,670            | \$36,495            |
| 2029       | \$303,706                      | \$767,370                  | 39.6 %            | Medium                   | 3.00 %                          | \$155,167          | \$0                          | \$4,463            | \$171,627           |
| 2030       | \$291,709                      | \$742,478                  | 39.3 %            | Medium                   | 3.00 %                          | \$159,822          | \$0                          | \$5,613            | \$0                 |
| 2031       | \$457,145                      | \$897,481                  | 50.9 %            | Medium                   | 3.00 %                          | \$164,617          | \$0                          | \$7,234            | \$120,956           |
| 2032       | \$508,039                      | \$936,531                  | 54.2 %            | Medium                   | 3.00 %                          | \$169,555          | \$0                          | \$8,582            | \$49,257            |
| 2033       | \$636,919                      | \$1,054,704                | 60.4 %            | Medium                   | 3.00 %                          | \$174,642          | \$0                          | \$10,619           | \$42,308            |
| 2034       | \$779,873                      | \$1,187,805                | 65.7 %            | Medium                   | 3.00 %                          | \$179,881          | \$0                          | \$11,635           | \$198,963           |
| 2035       | \$772,426                      | \$1,167,895                | 66.1 %            | Medium                   | 3.00 %                          | \$185,278          | \$0                          | \$13,066           | \$0                 |
| 2036       | \$970,770                      | \$1,356,801                | 71.5 %            | Low                      | 3.00 %                          | \$190,836          | \$0                          | \$14,907           | \$158,364           |
| 2037       | \$1,018,149                    | \$1,392,875                | 73.1 %            | Low                      | 3.00 %                          | \$196,561          | \$0                          | \$16,862           | \$0                 |
| 2038       | \$1,231,572                    | \$1,597,901                | 77.1 %            | Low                      | 3.00 %                          | \$202,458          | \$0                          | \$19,760           | \$49,046            |
| 2039       | \$1,404,743                    | \$1,763,457                | 79.7 %            | Low                      | 3.00 %                          | \$208,532          | \$0                          | \$21,050           | \$230,652           |
| 2040       | \$1,403,672                    | \$1,751,970                | 80.1 %            | Low                      | 3.00 %                          | \$214,788          | \$0                          | \$22,822           | \$0                 |
| 2041       | \$1,641,283                    | \$1,982,905                | 82.8 %            | Low                      | 3.00 %                          | \$221,231          | \$0                          | \$25,232           | \$162,555           |
| 2042       | \$1,725,191                    | \$2,058,688                | 83.8 %            | Low                      | 3.00 %                          | \$227,868          | \$0                          | \$26,466           | \$173,698           |
| 2043       | \$1,805,827                    | \$2,130,779                | 84.7 %            | Low                      | 3.00 %                          | \$234,704          | \$0                          | \$28,617           | \$56,858            |
| 2044       | \$2,012,291                    | \$2,331,056                | 86.3 %            | Low                      | 3.00 %                          | \$241,745          | \$0                          | \$30,199           | \$267,389           |
| 2045       | \$2,016,846                    | \$2,326,341                | 86.7 %            | Low                      | 3.00 %                          | \$248,998          | \$0                          | \$31,686           | \$86,799            |
| 2046       | \$2,210,732                    | \$2,513,516                | 88.0 %            | Low                      | 3.00 %                          | \$256,468          | \$0                          | \$25,884           | \$1,250,389         |
| 2047       | \$1,242,695                    | \$1,514,011                | 82.1 %            | Low                      | 3.00 %                          | \$264,162          | \$0                          | \$20,764           | \$0                 |
| 2048       | \$1,527,621                    | \$1,778,812                | 85.9 %            | Low                      | 3.00 %                          | \$272,087          | \$0                          | \$20,653           | \$592,484           |
| 2049       | \$1,227,876                    | \$1,447,880                | 84.8 %            | Low                      | 3.00 %                          | \$280,249          | \$0                          | \$16,797           | \$511,788           |
| 2050       | \$1,013,134                    | \$1,196,915                | 84.6 %            | Low                      | 3.00 %                          | \$288,657          | \$0                          | \$17,482           | \$0                 |
| 2051       | \$1,319,272                    | \$1,472,545                | 89.6 %            | Low                      | 3.00 %                          | \$297,316          | \$0                          | \$16,229           | \$786,798           |
| 2052       | \$846,020                      | \$953,235                  | 88.8 %            | Low                      | 3.00 %                          | \$306,236          | \$0                          | \$15,091           | \$0                 |
| 2053       | \$1,167,347                    | \$1,236,154                | 94.4 %            | Low                      | 3.00 %                          | \$315,423          | \$0                          | \$19,134           | \$116,396           |
| 2054       | \$1,385,508                    | \$1,415,303                | 97.9 %            | Low                      | 3.00 %                          | \$324,886          | \$0                          | \$20,666           | \$359,349           |
| 2055       | \$1,371,711                    | \$1,357,443                | 101.1 %           | Low                      | 3.00 %                          | \$334,632          | \$0                          | \$23,245           | \$0                 |

# 30-Year Income/Expense Detail

Report # 56093-0  
Full

| Fiscal Year                                    | 2026      | 2027      | 2028      | 2029      | 2030      |
|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|
| Starting Reserve Balance                       | \$0       | \$37,946  | \$185,884 | \$303,706 | \$291,709 |
| Annual Reserve Funding                         | \$142,000 | \$146,260 | \$150,648 | \$155,167 | \$159,822 |
| Recommended Special Assessments                | \$0       | \$0       | \$0       | \$0       | \$0       |
| Interest Earnings                              | \$284     | \$1,678   | \$3,670   | \$4,463   | \$5,613   |
| Total Income                                   | \$142,284 | \$185,884 | \$340,201 | \$463,336 | \$457,145 |
| # Component                                    |           |           |           |           |           |
| <b>Sites and Grounds</b>                       |           |           |           |           |           |
| 21050 Driveway Concrete - Replace - 5%         | \$0       | \$0       | \$0       | \$109,956 | \$0       |
| 21090 Concrete Walkways - Replace - 5%         | \$0       | \$0       | \$0       | \$47,684  | \$0       |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | \$30,738  | \$0       | \$0       | \$0       | \$0       |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | \$73,600  | \$0       | \$0       | \$0       | \$0       |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | \$0       | \$0       | \$36,495  | \$0       | \$0       |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | \$0       | \$0       | \$0       | \$13,987  | \$0       |
| 21330 Site Fence: Wood 2-Rail - Replace        | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21331 Site Fence: Wood 3-Rail - Replace        | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21332 Site Fence: Wood Privacy- Replace (2021) | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21333 Site Fence: Wood Privacy- Replace (2023) | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21334 Site Fence: Wood Privacy- Replace (2024) | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21340 Site Fence: Composite 2-Rail - Replace   | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21600 Mailbox Kiosks - Replace (2015)          | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21601 Mailbox Kiosks - Replace (2021)          | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21602 Mailbox Kiosks - Replace (2023)          | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21610 Signs/Monuments - Refurbish              | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21690 Site Furnishings - Replace               | \$0       | \$0       | \$0       | \$0       | \$0       |
| 23600 Gazebo Roof - Replace                    | \$0       | \$0       | \$0       | \$0       | \$0       |
| 23601 Mailbox Roof - Replace (2015)            | \$0       | \$0       | \$0       | \$0       | \$0       |
| 23602 Mailbox Roof - Replace (2021)            | \$0       | \$0       | \$0       | \$0       | \$0       |
| <b>Mechanical</b>                              |           |           |           |           |           |
| 25570 Irrigation Clocks - Replace              | \$0       | \$0       | \$0       | \$0       | \$0       |
| Total Expenses                                 | \$104,338 | \$0       | \$36,495  | \$171,627 | \$0       |
| Ending Reserve Balance                         | \$37,946  | \$185,884 | \$303,706 | \$291,709 | \$457,145 |

| Fiscal Year                                    | 2031      | 2032      | 2033      | 2034      | 2035      |
|------------------------------------------------|-----------|-----------|-----------|-----------|-----------|
| Starting Reserve Balance                       | \$457,145 | \$508,039 | \$636,919 | \$779,873 | \$772,426 |
| Annual Reserve Funding                         | \$164,617 | \$169,555 | \$174,642 | \$179,881 | \$185,278 |
| Recommended Special Assessments                | \$0       | \$0       | \$0       | \$0       | \$0       |
| Interest Earnings                              | \$7,234   | \$8,582   | \$10,619  | \$11,635  | \$13,066  |
| Total Income                                   | \$628,996 | \$686,176 | \$822,181 | \$971,389 | \$970,770 |
| # Component                                    |           |           |           |           |           |
| <b>Sites and Grounds</b>                       |           |           |           |           |           |
| 21050 Driveway Concrete - Replace - 5%         | \$0       | \$0       | \$0       | \$127,469 | \$0       |
| 21090 Concrete Walkways - Replace - 5%         | \$0       | \$0       | \$0       | \$55,279  | \$0       |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | \$35,634  | \$0       | \$0       | \$0       | \$0       |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | \$85,323  | \$0       | \$0       | \$0       | \$0       |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | \$0       | \$0       | \$42,308  | \$0       | \$0       |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | \$0       | \$0       | \$0       | \$16,215  | \$0       |
| 21330 Site Fence: Wood 2-Rail - Replace        | \$0       | \$13,435  | \$0       | \$0       | \$0       |
| 21331 Site Fence: Wood 3-Rail - Replace        | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21332 Site Fence: Wood Privacy- Replace (2021) | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21333 Site Fence: Wood Privacy- Replace (2023) | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21334 Site Fence: Wood Privacy- Replace (2024) | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21340 Site Fence: Composite 2-Rail - Replace   | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21600 Mailbox Kiosks - Replace (2015)          | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21601 Mailbox Kiosks - Replace (2021)          | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21602 Mailbox Kiosks - Replace (2023)          | \$0       | \$0       | \$0       | \$0       | \$0       |
| 21610 Signs/Monuments - Refurbish              | \$0       | \$35,822  | \$0       | \$0       | \$0       |
| 21690 Site Furnishings - Replace               | \$0       | \$0       | \$0       | \$0       | \$0       |
| 23600 Gazebo Roof – Replace                    | \$0       | \$0       | \$0       | \$0       | \$0       |
| 23601 Mailbox Roof – Replace (2015)            | \$0       | \$0       | \$0       | \$0       | \$0       |
| 23602 Mailbox Roof – Replace (2021)            | \$0       | \$0       | \$0       | \$0       | \$0       |
| <b>Mechanical</b>                              |           |           |           |           |           |
| 25570 Irrigation Clocks - Replace              | \$0       | \$0       | \$0       | \$0       | \$0       |
| Total Expenses                                 | \$120,956 | \$49,257  | \$42,308  | \$198,963 | \$0       |
| Ending Reserve Balance                         | \$508,039 | \$636,919 | \$779,873 | \$772,426 | \$970,770 |

| Fiscal Year                                    | 2036        | 2037        | 2038        | 2039        | 2040        |
|------------------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Starting Reserve Balance                       | \$970,770   | \$1,018,149 | \$1,231,572 | \$1,404,743 | \$1,403,672 |
| Annual Reserve Funding                         | \$190,836   | \$196,561   | \$202,458   | \$208,532   | \$214,788   |
| Recommended Special Assessments                | \$0         | \$0         | \$0         | \$0         | \$0         |
| Interest Earnings                              | \$14,907    | \$16,862    | \$19,760    | \$21,050    | \$22,822    |
| Total Income                                   | \$1,176,513 | \$1,231,572 | \$1,453,790 | \$1,634,325 | \$1,641,283 |
| # Component                                    |             |             |             |             |             |
| <b>Sites and Grounds</b>                       |             |             |             |             |             |
| 21050 Driveway Concrete - Replace - 5%         | \$0         | \$0         | \$0         | \$147,771   | \$0         |
| 21090 Concrete Walkways - Replace - 5%         | \$0         | \$0         | \$0         | \$64,084    | \$0         |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | \$41,309    | \$0         | \$0         | \$0         | \$0         |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | \$98,912    | \$0         | \$0         | \$0         | \$0         |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | \$0         | \$0         | \$49,046    | \$0         | \$0         |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | \$0         | \$0         | \$0         | \$18,797    | \$0         |
| 21330 Site Fence: Wood 2-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21331 Site Fence: Wood 3-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21332 Site Fence: Wood Privacy- Replace (2021) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21333 Site Fence: Wood Privacy- Replace (2023) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21334 Site Fence: Wood Privacy- Replace (2024) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21340 Site Fence: Composite 2-Rail - Replace   | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21600 Mailbox Kiosks - Replace (2015)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21601 Mailbox Kiosks - Replace (2021)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21602 Mailbox Kiosks - Replace (2023)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21610 Signs/Monuments - Refurbish              | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21690 Site Furnishings - Replace               | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23600 Gazebo Roof – Replace                    | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23601 Mailbox Roof – Replace (2015)            | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23602 Mailbox Roof – Replace (2021)            | \$0         | \$0         | \$0         | \$0         | \$0         |
| <b>Mechanical</b>                              |             |             |             |             |             |
| 25570 Irrigation Clocks - Replace              | \$18,143    | \$0         | \$0         | \$0         | \$0         |
| Total Expenses                                 | \$158,364   | \$0         | \$49,046    | \$230,652   | \$0         |
| Ending Reserve Balance                         | \$1,018,149 | \$1,231,572 | \$1,404,743 | \$1,403,672 | \$1,641,283 |

| Fiscal Year                                    | 2041        | 2042        | 2043        | 2044        | 2045        |
|------------------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Starting Reserve Balance                       | \$1,641,283 | \$1,725,191 | \$1,805,827 | \$2,012,291 | \$2,016,846 |
| Annual Reserve Funding                         | \$221,231   | \$227,868   | \$234,704   | \$241,745   | \$248,998   |
| Recommended Special Assessments                | \$0         | \$0         | \$0         | \$0         | \$0         |
| Interest Earnings                              | \$25,232    | \$26,466    | \$28,617    | \$30,199    | \$31,686    |
| Total Income                                   | \$1,887,746 | \$1,979,525 | \$2,069,149 | \$2,284,235 | \$2,297,530 |
| # Component                                    |             |             |             |             |             |
| <b>Sites and Grounds</b>                       |             |             |             |             |             |
| 21050 Driveway Concrete - Replace - 5%         | \$0         | \$0         | \$0         | \$171,307   | \$0         |
| 21090 Concrete Walkways - Replace - 5%         | \$0         | \$0         | \$0         | \$74,291    | \$0         |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | \$47,889    | \$0         | \$0         | \$0         | \$0         |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | \$114,666   | \$0         | \$0         | \$0         | \$0         |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | \$0         | \$0         | \$56,858    | \$0         | \$0         |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | \$0         | \$0         | \$0         | \$21,791    | \$0         |
| 21330 Site Fence: Wood 2-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21331 Site Fence: Wood 3-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21332 Site Fence: Wood Privacy- Replace (2021) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21333 Site Fence: Wood Privacy- Replace (2023) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21334 Site Fence: Wood Privacy- Replace (2024) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21340 Site Fence: Composite 2-Rail - Replace   | \$0         | \$173,698   | \$0         | \$0         | \$0         |
| 21600 Mailbox Kiosks - Replace (2015)          | \$0         | \$0         | \$0         | \$0         | \$84,168    |
| 21601 Mailbox Kiosks - Replace (2021)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21602 Mailbox Kiosks - Replace (2023)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21610 Signs/Monuments - Refurbish              | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21690 Site Furnishings - Replace               | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23600 Gazebo Roof – Replace                    | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23601 Mailbox Roof – Replace (2015)            | \$0         | \$0         | \$0         | \$0         | \$2,630     |
| 23602 Mailbox Roof – Replace (2021)            | \$0         | \$0         | \$0         | \$0         | \$0         |
| <b>Mechanical</b>                              |             |             |             |             |             |
| 25570 Irrigation Clocks - Replace              | \$0         | \$0         | \$0         | \$0         | \$0         |
| Total Expenses                                 | \$162,555   | \$173,698   | \$56,858    | \$267,389   | \$86,799    |
| Ending Reserve Balance                         | \$1,725,191 | \$1,805,827 | \$2,012,291 | \$2,016,846 | \$2,210,732 |

| Fiscal Year                                    | 2046        | 2047        | 2048        | 2049        | 2050        |
|------------------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Starting Reserve Balance                       | \$2,210,732 | \$1,242,695 | \$1,527,621 | \$1,227,876 | \$1,013,134 |
| Annual Reserve Funding                         | \$256,468   | \$264,162   | \$272,087   | \$280,249   | \$288,657   |
| Recommended Special Assessments                | \$0         | \$0         | \$0         | \$0         | \$0         |
| Interest Earnings                              | \$25,884    | \$20,764    | \$20,653    | \$16,797    | \$17,482    |
| Total Income                                   | \$2,493,084 | \$1,527,621 | \$1,820,360 | \$1,524,922 | \$1,319,272 |
| # Component                                    |             |             |             |             |             |
| <b>Sites and Grounds</b>                       |             |             |             |             |             |
| 21050 Driveway Concrete - Replace - 5%         | \$0         | \$0         | \$0         | \$198,592   | \$0         |
| 21090 Concrete Walkways - Replace - 5%         | \$0         | \$0         | \$0         | \$86,123    | \$0         |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | \$55,516    | \$0         | \$0         | \$0         | \$0         |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | \$132,930   | \$0         | \$0         | \$0         | \$0         |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | \$0         | \$0         | \$65,914    | \$0         | \$0         |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | \$0         | \$0         | \$0         | \$25,262    | \$0         |
| 21330 Site Fence: Wood 2-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21331 Site Fence: Wood 3-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21332 Site Fence: Wood Privacy- Replace (2021) | \$1,061,943 | \$0         | \$0         | \$0         | \$0         |
| 21333 Site Fence: Wood Privacy- Replace (2023) | \$0         | \$0         | \$526,570   | \$0         | \$0         |
| 21334 Site Fence: Wood Privacy- Replace (2024) | \$0         | \$0         | \$0         | \$201,811   | \$0         |
| 21340 Site Fence: Composite 2-Rail - Replace   | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21600 Mailbox Kiosks - Replace (2015)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21601 Mailbox Kiosks - Replace (2021)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21602 Mailbox Kiosks - Replace (2023)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21610 Signs/Monuments - Refurbish              | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21690 Site Furnishings - Replace               | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23600 Gazebo Roof – Replace                    | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23601 Mailbox Roof – Replace (2015)            | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23602 Mailbox Roof – Replace (2021)            | \$0         | \$0         | \$0         | \$0         | \$0         |
| <b>Mechanical</b>                              |             |             |             |             |             |
| 25570 Irrigation Clocks - Replace              | \$0         | \$0         | \$0         | \$0         | \$0         |
| Total Expenses                                 | \$1,250,389 | \$0         | \$592,484   | \$511,788   | \$0         |
| Ending Reserve Balance                         | \$1,242,695 | \$1,527,621 | \$1,227,876 | \$1,013,134 | \$1,319,272 |

| Fiscal Year                                    | 2051        | 2052        | 2053        | 2054        | 2055        |
|------------------------------------------------|-------------|-------------|-------------|-------------|-------------|
| Starting Reserve Balance                       | \$1,319,272 | \$846,020   | \$1,167,347 | \$1,385,508 | \$1,371,711 |
| Annual Reserve Funding                         | \$297,316   | \$306,236   | \$315,423   | \$324,886   | \$334,632   |
| Recommended Special Assessments                | \$0         | \$0         | \$0         | \$0         | \$0         |
| Interest Earnings                              | \$16,229    | \$15,091    | \$19,134    | \$20,666    | \$23,245    |
| Total Income                                   | \$1,632,818 | \$1,167,347 | \$1,501,904 | \$1,731,060 | \$1,729,588 |
| # Component                                    |             |             |             |             |             |
| <b>Sites and Grounds</b>                       |             |             |             |             |             |
| 21050 Driveway Concrete - Replace - 5%         | \$0         | \$0         | \$0         | \$230,223   | \$0         |
| 21090 Concrete Walkways - Replace - 5%         | \$0         | \$0         | \$0         | \$99,841    | \$0         |
| 21320 Site Fence: Wood 3-Rail - Repair/Paint   | \$64,359    | \$0         | \$0         | \$0         | \$0         |
| 21321 Fence: Wood Privacy- Repair/Paint (2021) | \$154,102   | \$0         | \$0         | \$0         | \$0         |
| 21322 Fence: Wood Privacy- Repair/Paint (2023) | \$0         | \$0         | \$76,412    | \$0         | \$0         |
| 21323 Fence: Wood Privacy- Repair/Paint (2024) | \$0         | \$0         | \$0         | \$29,285    | \$0         |
| 21330 Site Fence: Wood 2-Rail - Replace        | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21331 Site Fence: Wood 3-Rail - Replace        | \$420,988   | \$0         | \$0         | \$0         | \$0         |
| 21332 Site Fence: Wood Privacy- Replace (2021) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21333 Site Fence: Wood Privacy- Replace (2023) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21334 Site Fence: Wood Privacy- Replace (2024) | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21340 Site Fence: Composite 2-Rail - Replace   | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21600 Mailbox Kiosks - Replace (2015)          | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21601 Mailbox Kiosks - Replace (2021)          | \$62,813    | \$0         | \$0         | \$0         | \$0         |
| 21602 Mailbox Kiosks - Replace (2023)          | \$0         | \$0         | \$39,983    | \$0         | \$0         |
| 21610 Signs/Monuments - Refurbish              | \$0         | \$0         | \$0         | \$0         | \$0         |
| 21690 Site Furnishings - Replace               | \$37,688    | \$0         | \$0         | \$0         | \$0         |
| 23600 Gazebo Roof – Replace                    | \$15,442    | \$0         | \$0         | \$0         | \$0         |
| 23601 Mailbox Roof – Replace (2015)            | \$0         | \$0         | \$0         | \$0         | \$0         |
| 23602 Mailbox Roof – Replace (2021)            | \$3,141     | \$0         | \$0         | \$0         | \$0         |
| <b>Mechanical</b>                              |             |             |             |             |             |
| 25570 Irrigation Clocks - Replace              | \$28,266    | \$0         | \$0         | \$0         | \$0         |
| Total Expenses                                 | \$786,798   | \$0         | \$116,396   | \$359,349   | \$0         |
| Ending Reserve Balance                         | \$846,020   | \$1,167,347 | \$1,385,508 | \$1,371,711 | \$1,729,588 |



## Accuracy, Limitations, and Disclosures

Association Reserves and its employees have no ownership, management, or other business relationships with the client other than this Reserve Study engagement. Bryan Farley, R.S., president of the Colorado LLC, is a credentialed Reserve Specialist (#260). All work done by Association Reserves is performed under his Responsible Charge and is performed in accordance with National Reserve Study Standards (NRSS). There are no material issues to our knowledge that have not been disclosed to the client that would cause a distortion of the client's situation. Per NRSS, information provided by official representative(s) of the client, vendors, and suppliers regarding financial details, component physical details and/or quantities, or historical issues/conditions will be deemed reliable, and is not intended to be used for the purpose of any type of audit, quality/forensic analysis, or background checks of historical records. As such, information provided to us has not been audited or independently verified. Estimates for interest and inflation have been included, because including such estimates are more accurate than ignoring them completely. When we are hired to prepare Update reports, the client is considered to have deemed those previously developed component quantities as accurate and reliable, whether established by our firm or other individuals/firms (unless specifically mentioned in our Site Inspection Notes). During inspections our company standard is to establish measurements within 5% accuracy, and our scope includes visual inspection of accessible areas and components and does not include any destructive or other testing. Our work is done only for budget purposes. Uses or expectations outside our expertise and scope of work include, but are not limited to, project audit, quality inspection, and the identification of construction defects, hazardous materials, or dangerous conditions. Identifying hidden issues such as but not limited to plumbing or electrical problems are also outside our scope of work. Our estimates assume proper original installation & construction, adherence to recommended preventive maintenance, a stable economic environment, and do not consider frequency or severity of natural disasters. Our opinions of component Useful Life, Remaining Useful Life, and current or future cost estimates are not a warranty or guarantee of actual costs or timing. Because the physical and financial status of the property, legislation, the economy, weather, owner expectations, and usage are all in a continual state of change over which we have no control, we do not expect that the events projected in this document will all occur exactly as planned. This Reserve Study is by nature a "one-year" document in need of being updated annually so that more accurate estimates can be incorporated. It is only because a long-term perspective improves the accuracy of near-term planning that this Report projects expenses into the future. We fully expect a number of adjustments will be necessary through the interim years to the cost and timing of expense projections and the funding necessary to prepare for those estimated expenses.



## Terms and Definitions

|                                    |                                                                                                                                                                                                                                                                                                  |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>BTU</b>                         | British Thermal Unit (a standard unit of energy)                                                                                                                                                                                                                                                 |
| <b>DIA</b>                         | Diameter                                                                                                                                                                                                                                                                                         |
| <b>GSF</b>                         | Gross Square Feet (area). Equivalent to Square Feet                                                                                                                                                                                                                                              |
| <b>GSY</b>                         | Gross Square Yards (area). Equivalent to Square Yards                                                                                                                                                                                                                                            |
| <b>HP</b>                          | Horsepower                                                                                                                                                                                                                                                                                       |
| <b>LF</b>                          | Linear Feet (length)                                                                                                                                                                                                                                                                             |
| <b>UOM</b>                         | Unit of Measure                                                                                                                                                                                                                                                                                  |
| <b>Effective Age</b>               | The difference between Useful Life and Remaining Useful Life. Note that this is not necessarily equivalent to the chronological age of the component.                                                                                                                                            |
| <b>Fully Funded Balance (FFB)</b>  | The value of the deterioration of the Reserve Components. This is the fraction of life "used up" of each component multiplied by its estimated Current Replacement. While calculated for each component, it is summed together for an association total.                                         |
| <b>Inflation</b>                   | Cost factors are adjusted for inflation at the rate defined in the Executive Summary and compounded annually. These increasing costs can be seen as you follow the recurring cycles of a component on the "30-yr Income/Expense Detail" table.                                                   |
| <b>Interest</b>                    | Interest earnings on Reserve Funds are calculated using the average balance for the year (taking into account income and expenses through the year) and compounded monthly using the rate defined in the Executive Summary. Annual interest earning assumption appears in the Executive Summary. |
| <b>Percent Funded</b>              | The ratio, at a particular point in time (the first day of the Fiscal Year), of the actual (or projected) Reserve Balance to the Fully Funded Balance, expressed as a percentage.                                                                                                                |
| <b>Remaining Useful Life (RUL)</b> | The estimated time, in years, that a common area component can be expected to continue to serve its intended function.                                                                                                                                                                           |
| <b>Useful Life (UL)</b>            | The estimated time, in years, that a common area component can be expected to serve its intended function.                                                                                                                                                                                       |



## Component Details

The primary purpose of the photographic appendix is to provide the reader with the basis of our funding assumptions resulting from our physical analysis and subsequent research. The photographs herein represent a wide range of elements that were observed and measured against National Reserve Study Standards to determine if they meet the criteria for reserve funding:

- Client's obligation to maintain/replace existing elements.
- Schedule/need for projects can be reasonably anticipated. A component must have a "reasonably anticipated" limited useful life (this includes a component with an estimated life of greater than 30 years). The useful life limit does not have to be due to physical deterioration but may reach the end of its useful life due to esthetics (out of style), economic obsolescence (no longer energy efficient), or other reasons.
- The total cost for the project is material to the association, can be reasonably estimated, and includes direct/related costs. The next occurrence of the expense must be above a minimum threshold, reasonably estimated, and include all related costs. Material to the association because typically an expense less than ~1%-.5% of the total annual budget is best categorized by expensing the cost to the operating account. Reasonable estimated because unsupported "guesses" are inappropriate (it is random or unknowable), estimating what the expense will be can be valid if the estimate is provided by a qualified outside expert, based on the association's history (i.e., historical frequency or patterns of repairs), manufacture recommendations, etc.

Some components are recommended for reserve funding, while others are not. The components that meet these criteria in our judgment are shown with corresponding maintenance, repair or replacement cycles to the left of the photo (UL = Useful Life or how often the project is expected to occur, RUL = Remaining Useful Life or how many years from our reporting period) and a representative market cost range termed "Best Case" and "Worst Case" below the photo. Many factors can result in a wide variety of potential costs; we are attempting to represent a market average for budget purposes. Where there is no UL, the component is expected to be a one-time expense. Where no pricing, the component is deemed inappropriate for the Reserve Fund.

## Sites and Grounds

**Comp #:** 21050 Driveway Concrete - Replace - 5%

**Approx Quantity:** 115,000 GSF

**Location:** Common Areas

**Funded?:** Yes.

**History:**

**Comments:** Concrete driveways determined to be in fair condition typically may exhibit small changes in slope and narrow "hair-line" wide cracks. Overall no unusual or extreme signs of age noted. Driveways are reported to be the maintenance and repair responsibility of the client. Although complete replacement of all areas together should not be required conditions observed merit inclusion of an allowance for ongoing repairs and partial replacements. Exposure to sunlight weather and frequent vehicle traffic can lead to larger more frequent repairs especially for older properties. Inspect all areas periodically to identify trip hazards or other safety issues. Timeline and cost ranges shown here should be re-evaluated during future Reserve Study updates.

**Useful Life:**

5 years

**Remaining Life:**

3 years



**Lower Estimate:**

\$ 90,600

**Higher Estimate:**

\$ 111,000

**Cost Source:** Allowance

**Comp #: 21090 Concrete Walkways - Replace - 5%**

**Approx Quantity: 49,900 GSF**

**Location:** Common Areas

**Funded?:** Yes.

**History:**

**Comments:** Concrete sidewalks determined to be in fair condition typically exhibit minor changes in slope and a moderate percentage of cracking and surface wear. Trip hazards may be increasing in frequency and severity and should be closely monitored to prevent further risks. The Rocky Mountain Region is home to expansive soils. One of the causes of concrete damage in this type of climate is soil moisture. Expansive soils tend to swell in size when wet and contract as they dry out. As the soil expands and contracts it can create enough force to cause major damage to sidewalks. Repair any trip and fall hazards immediately to ensure safety. As routine maintenance inspect regularly pressure wash for appearance and repair promptly as needed to prevent water penetrating into the base and causing further damage. In our experience larger repair/replacement expenses emerge as the community ages. Although difficult to predict timing cost and scope we suggest a rotating funding allowance to supplement the operating/maintenance budget for periodic larger repairs. Adjust as conditions actual expense patterns dictate within future reserve study updates.

**Useful Life:**

5 years

**Remaining Life:**

3 years



**Lower Estimate:**

\$ 39,300

**Higher Estimate:**

\$ 48,000

**Cost Source:** Allowance

**Comp #: 21320 Site Fence: Wood 3-Rail - Repair/Paint****Approx Quantity: 4,700 LF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2021.

**Comments:** Wood fencing determined to be in poor condition typically exhibits more advanced deterioration of coating with notable wear, possibly resulting in rotting of wood structure in places. Poor, inconsistent curb appeal. Regular uniform, professional paint or sealer applications are recommended for appearance, protection of wood and maximum design life. Repair as needed and clean prior to application. Plan for regular applications as shown below. Timing of repair/paint cycles may need to be coordinated with eventual fence replacement.

**Useful Life:**

5 years

**Remaining Life:**

0 years

**Lower Estimate:**

\$ 27,700

**Higher Estimate:**

\$ 33,800

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21321 Fence: Wood Privacy- Repair/Paint (2021)****Approx Quantity: 9,200 LF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2021.

**Comments:** Wood fencing determined to be in poor condition typically exhibits more advanced deterioration of coating with notable wear, possibly resulting in rotting of wood structure in places. Poor, inconsistent curb appeal. Regular uniform, professional paint or sealer applications are recommended for appearance, protection of wood and maximum design life. Repair as needed and clean prior to application. Plan for regular applications as shown below. Timing of repair/paint cycles may need to be coordinated with eventual fence replacement.

**Useful Life:**

5 years

**Remaining Life:**

0 years

**Lower Estimate:**

\$ 66,200

**Higher Estimate:**

\$ 81,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21322 Fence: Wood Privacy- Repair/Paint (2023)****Approx Quantity: 4,300 LF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2023.

**Comments:** Wood fencing determined to be in fair condition typically exhibits a finish coat which is mostly uniform but exhibits minor to moderate surface wear or fading possibly exposing wood substrate in some areas. Regular uniform professional paint or sealer applications are recommended for appearance protection of wood and maximum design life. Repair as needed and clean prior to application. Plan for regular applications as shown below. Timing of repair/paint cycles may need to be coordinated with eventual fence replacement.

**Useful Life:**

5 years

**Remaining Life:**

2 years

**Lower Estimate:**

\$ 31,000

**Higher Estimate:**

\$ 37,800

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21323 Fence: Wood Privacy- Repair/Paint (2024)****Approx Quantity: 1,600 LF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2024.

**Comments:** Wood fencing determined to be in fair condition typically exhibits a finish coat which is mostly uniform but exhibits minor to moderate surface wear or fading possibly exposing wood substrate in some areas. Regular uniform professional paint or sealer applications are recommended for appearance protection of wood and maximum design life. Repair as needed and clean prior to application. Plan for regular applications as shown below. Timing of repair/paint cycles may need to be coordinated with eventual fence replacement.

**Useful Life:**

5 years

**Remaining Life:**

3 years

**Lower Estimate:**

\$ 11,500

**Higher Estimate:**

\$ 14,100

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21330 Site Fence: Wood 2-Rail - Replace**

**Approx Quantity: 370 LF**

**Location:** Common Areas

**Funded?:** Yes.

**History:**

**Comments:** Wood fencing determined to be in fair condition typically exhibits some minor to moderate amounts of surface wear and other signs of age which may include a small percentage of warped split and/or rotted sections. In general appearance is consistent but declining. As routine maintenance inspect regularly for any damage repair as needed and avoid contact with ground and surrounding vegetation wherever possible. Regular cycles of uniform professional sealing/painting will help to maintain appearance and maximize life. In our experience wood fencing will typically eventually break down due to a combination of sun and weather exposure which is sometimes exacerbated by other factors such as irrigation overspray abuse and lack of preventive maintenance. Recommendation and costs shown here are based on replacement with similar style and material. However the client might want to consider replacing with more sturdy lower-maintenance products like composite vinyl etc. Although installation costs are higher total life cycle cost is lower due to less maintenance and longer design life expectancy.

**Useful Life:**  
30 years

**Remaining Life:**  
6 years



**Lower Estimate:**

\$ 10,100

**Higher Estimate:**

\$ 12,400

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21331 Site Fence: Wood 3-Rail - Replace**

**Approx Quantity: 4,700 LF**

**Location:** Common Areas

**Funded?:** Yes.

**History:** Installed in ~2021.

**Comments:** Wood fencing determined to be in fair condition typically exhibits some minor to moderate amounts of surface wear and other signs of age which may include a small percentage of warped split and/or rotted sections. In general appearance is consistent but declining. As routine maintenance inspect regularly for any damage repair as needed and avoid contact with ground and surrounding vegetation wherever possible. Regular cycles of uniform professional sealing/painting will help to maintain appearance and maximize life. In our experience wood fencing will typically eventually break down due to a combination of sun and weather exposure which is sometimes exacerbated by other factors such as irrigation overspray abuse and lack of preventive maintenance. Recommendation and costs shown here are based on replacement with similar style and material. However the client might want to consider replacing with more sturdy lower-maintenance products like composite vinyl etc. Although installation costs are higher total life cycle cost is lower due to less maintenance and longer design life expectancy.

**Useful Life:**  
30 years

**Remaining Life:**  
25 years



**Lower Estimate:**

\$ 181,000

**Higher Estimate:**

\$ 221,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21332 Site Fence: Wood Privacy- Replace (2021)**

**Approx Quantity: 9,200 LF**

**Location:** Common Areas

**Funded?:** Yes.

**History:** Installed in ~2021.

**Comments:** Wood fencing determined to be in fair condition typically exhibits some minor to moderate amounts of surface wear and other signs of age which may include a small percentage of warped split and/or rotted sections. In general appearance is consistent but declining. As routine maintenance inspect regularly for any damage repair as needed and avoid contact with ground and surrounding vegetation wherever possible. Regular cycles of uniform professional sealing/painting will help to maintain appearance and maximize life. In our experience wood fencing will typically eventually break down due to a combination of sun and weather exposure which is sometimes exacerbated by other factors such as irrigation overspray abuse and lack of preventive maintenance. Recommendation and costs shown here are based on replacement with similar style and material. However the client might want to consider replacing with more sturdy lower-maintenance products like composite vinyl etc. Although installation costs are higher total life cycle cost is lower due to less maintenance and longer design life expectancy.

**Useful Life:**  
25 years

**Remaining Life:**  
20 years



|                        |            |                         |            |
|------------------------|------------|-------------------------|------------|
| <b>Lower Estimate:</b> | \$ 529,000 | <b>Higher Estimate:</b> | \$ 647,000 |
|------------------------|------------|-------------------------|------------|

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21333 Site Fence: Wood Privacy- Replace (2023)**

**Approx Quantity: 4,300 LF**

**Location:** Common Areas

**Funded?:** Yes.

**History:** Installed in ~2023.

**Comments:** Wood fencing determined to be in fair condition typically exhibits some minor to moderate amounts of surface wear and other signs of age which may include a small percentage of warped split and/or rotted sections. In general appearance is consistent but declining. As routine maintenance inspect regularly for any damage repair as needed and avoid contact with ground and surrounding vegetation wherever possible. Regular cycles of uniform professional sealing/painting will help to maintain appearance and maximize life. In our experience wood fencing will typically eventually break down due to a combination of sun and weather exposure which is sometimes exacerbated by other factors such as irrigation overspray abuse and lack of preventive maintenance. Recommendation and costs shown here are based on replacement with similar style and material. However the client might want to consider replacing with more sturdy lower-maintenance products like composite vinyl etc. Although installation costs are higher total life cycle cost is lower due to less maintenance and longer design life expectancy.

**Useful Life:**  
25 years

**Remaining Life:**  
22 years



**Lower Estimate:**

\$ 247,000

**Higher Estimate:**

\$ 302,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21334 Site Fence: Wood Privacy- Replace (2024)****Approx Quantity: 1,600 LF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2024.

**Comments:** Wood fencing determined to be in fair condition typically exhibits some minor to moderate amounts of surface wear and other signs of age which may include a small percentage of warped split and/or rotted sections. In general appearance is consistent but declining. As routine maintenance inspect regularly for any damage repair as needed and avoid contact with ground and surrounding vegetation wherever possible. Regular cycles of uniform professional sealing/painting will help to maintain appearance and maximize life. In our experience wood fencing will typically eventually break down due to a combination of sun and weather exposure which is sometimes exacerbated by other factors such as irrigation overspray abuse and lack of preventive maintenance. Recommendation and costs shown here are based on replacement with similar style and material. However the client might want to consider replacing with more sturdy lower-maintenance products like composite vinyl etc. Although installation costs are higher total life cycle cost is lower due to less maintenance and longer design life expectancy.

**Useful Life:**

25 years

**Remaining Life:**

23 years

**Lower Estimate:**

\$ 92,000

**Higher Estimate:**

\$ 112,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21340 Site Fence: Composite 2-Rail - Replace****Approx Quantity: 2,700 LF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2012.

**Comments:** Fencing determined to be in fair condition typically exhibits some surface wear warping fading and/or chalking. May also exhibit some loose or missing panels and possibly minor leaning or damage. Overall appearance is consistent but declining. As routine maintenance inspect regularly for any damage and repair as needed from Operating budget pressure-clean as a general maintenance item or along with larger building projects not as separate Reserve item. Even with proactive maintenance plan to replace at roughly the time frame below due to damage/deterioration that will result from constant exposure.

**Useful Life:**

30 years

**Remaining Life:**

16 years

**Lower Estimate:**

\$ 97,400

**Higher Estimate:**

\$ 119,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21600 Mailbox Kiosks - Replace (2015)****Approx Quantity: 16 CBUs****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2015.

**Comments:** Mailbox kiosks determined to be in fair condition typically exhibit minor to moderate surface wear at this stage. All components and hardware appear to function properly but appearance is diminishing. Inspect regularly and clean by wiping down exterior surfaces. If necessary change lock cylinders lubricate hinges and repair as an Operating expense. Best to plan for total replacement at roughly the time frame below due to constant exposure usage and wear over time. Note USPS has a limited budget for replacement and should not be relied upon for purposes of long term planning.

**Useful Life:**

30 years

**Remaining Life:**

19 years

**Lower Estimate:**

\$ 43,200

**Higher Estimate:**

\$ 52,800

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21601 Mailbox Kiosks - Replace (2021)****Approx Quantity: 10 CBUs****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2021.**Comments:** Includes (6) West Park.

Mailbox kiosks determined to be in fair condition typically exhibit minor to moderate surface wear at this stage. All components and hardware appear to function properly but appearance is diminishing. Inspect regularly and clean by wiping down exterior surfaces. If necessary change lock cylinders lubricate hinges and repair as an Operating expense. Best to plan for total replacement at roughly the time frame below due to constant exposure usage and wear over time. Note USPS has a limited budget for replacement and should not be relied upon for purposes of long term planning.

**Useful Life:**

30 years

**Remaining Life:**

25 years

**Lower Estimate:**

\$ 27,000

**Higher Estimate:**

\$ 33,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

---

**Comp #: 21602 Mailbox Kiosks - Replace (2023)**

**Approx Quantity: 6 CBUs**

**Location:** Common Areas

**Funded?:** Yes.

**History:** Installed in ~2023.

**Comments:** Mailbox kiosks determined to be in fair condition typically exhibit minor to moderate surface wear at this stage. All components and hardware appear to function properly but appearance is diminishing. Inspect regularly and clean by wiping down exterior surfaces. If necessary change lock cylinders lubricate hinges and repair as an Operating expense. Best to plan for total replacement at roughly the time frame below due to constant exposure usage and wear over time. Note USPS has a limited budget for replacement and should not be relied upon for purposes of long term planning.

**Useful Life:**  
30 years

**Remaining Life:**  
27 years



|                        |                  |                         |                  |
|------------------------|------------------|-------------------------|------------------|
| <b>Lower Estimate:</b> | <b>\$ 16,200</b> | <b>Higher Estimate:</b> | <b>\$ 19,800</b> |
|------------------------|------------------|-------------------------|------------------|

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21610 Signs/Monuments - Refurbish**

**Approx Quantity: 3 Monuments**

**Location:** Common Areas

**Funded?:** Yes.

**History:**

**Comments:** Monument signage determined to be in fair condition typically exhibits acceptable appearance and aesthetics in keeping with local area but with more weathering and wear showing on surfaces. If present landscaping and lighting are still in serviceable condition. At this stage signage may be becoming more dated and diminishing in appeal. As routine maintenance inspect regularly clean/touch-up and repair as an Operating expense. Plan to refurbish or replace at the interval below. Timing and scope of refurbishing or replacement projects is subjective but should always be scheduled in order to maintain good curb appeal. In our experience most clients choose to refurbish or replace signage periodically in order to maintain good appearance and aesthetics in keeping with local area often before signage is in poor physical condition. If present concrete walls are expected to be painted and repaired as part of refurbishing but not fully replaced unless otherwise noted. Costs can vary significantly depending on style/type desired and may include additional costs for design work landscaping lighting water features etc. Reserve Study updates should incorporate any estimates or information collected regarding potential projects.

**Useful Life:**  
30 years

**Remaining Life:**  
6 years



**Lower Estimate:**

\$ 27,000

**Higher Estimate:**

\$ 33,000

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21690 Site Furnishings - Replace**

**Approx Quantity: 7 Pieces**

**Location:** Common Areas

**Funded?:** Yes.

**History:** Installed in ~2021.

**Comments:** Includes (2) Picnic Tables, (2) Benches, and (3) Art Pieces.

Outdoor/site furniture determined to be in fair condition typically exhibits typical signs of wear and age. Style is still appropriate for the local aesthetic standards of the development. Inspect regularly clean for appearance and repair as needed from general Operating funds. Cost to replace individual pieces may not meet threshold for Reserve funding. We recommend planning for regular intervals of complete replacement at the time frame indicated below to maintain a good consistent appearance in the common areas. Costs shown are based on replacement with comparable types unless otherwise noted.

**Useful Life:**  
30 years

**Remaining Life:**  
25 years



**Lower Estimate:**

\$ 16,200

**Higher Estimate:**

\$ 19,800

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 21770 Bridges – Replace/Rebuild**

**Approx Quantity: 2 Bridges**

**Location:** Common Areas

**Funded?:** No. Handle as an Operational Expense.

**History:**

**Comments:** Assuming normal wear and tear and good preventive maintenance complete replacement or reconstruction may be required at longer intervals including some or all components of structural framework pilings etc. If present reconstruction may also need to include replacement of electrical infrastructure or other features. In our experience all such projects are unique and we strongly recommend consulting with engineers or experienced contractors to properly determine existing conditions and required scope of work. Our inspection is visual only and does not incorporate any specific testing or structural evaluation. At this time costs related to this component are expected to be included in the Client's Operating budget or otherwise funded without the need for Reserve funds. No recommendation for Reserve funding at this time. However any repair and maintenance or other related expenditures should be tracked and this component should be re-evaluated during future Reserve Study updates based on most recent information and data available at that time. If deemed appropriate for Reserve funding component can be included in the funding plan at that time.

**Useful Life:**

**Remaining Life:**



**Lower Estimate:**

**Higher Estimate:**

**Cost Source:**

**Comp #: 23600 Gazebo Roof – Replace**

**Approx Quantity: 590 GSF**

**Location:** Common Areas

**Funded?:** Yes.

**History:** Installed in ~2021, per the client.

**Comments:** Roofing consists of Pro Panel metal roof. Typically metal roofs are either Pro-Panel seamed roofs or Standing Seam roofs. Pro Panel roofs are installed with exposed metal screws and fasteners while Standing Seam will snap lock panels over the mechanical seam with no penetrations to the underlayment. Advantages of metal roofs include long life expectancies with relatively low need to repair. Metal roofing is typically a long-lived component assuming it was properly installed and is properly maintained. As routine maintenance many manufacturers recommend inspections at least twice annually (once in the fall before the rainy season and again in the spring) and after large storm events. Promptly replace any damaged/missing sections or conduct any other repair needed to ensure waterproof integrity of roof. We recommend having roof inspected in greater detail (including conditions of sub-surface materials) by an independent roofing consultant prior to replacement. There is a wealth of information available through organizations such as the Roof Consultant Institute <http://www.rci-online.org> and the National Roofing Contractors client (NRCA) <http://www.nrca.net/>. If the roof has a warranty be sure to review terms and conduct proper inspections/repairs as needed to keep warranty in force.

**Useful Life:**

30 years

**Remaining Life:**

25 years



**Lower Estimate:**

\$ 6,640

**Higher Estimate:**

\$ 8,110

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 23601 Mailbox Roof – Replace (2015)****Approx Quantity: 120 GSF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2015.

**Comments:** Roofing consists of Pro Panel metal roof. Typically metal roofs are either Pro-Panel seamed roofs or Standing Seam roofs. Pro Panel roofs are installed with exposed metal screws and fasteners while Standing Seam will snap lock panels over the mechanical seam with no penetrations to the underlayment. Advantages of metal roofs include long life expectancies with relatively low need to repair. Metal roofing is typically a long-lived component assuming it was properly installed and is properly maintained. As routine maintenance many manufacturers recommend inspections at least twice annually (once in the fall before the rainy season and again in the spring) and after large storm events. Promptly replace any damaged/missing sections or conduct any other repair needed to ensure waterproof integrity of roof. We recommend having roof inspected in greater detail (including conditions of sub-surface materials) by an independent roofing consultant prior to replacement. There is a wealth of information available through organizations such as the Roof Consultant Institute <http://www.rci-online.org> and the National Roofing Contractors client (NRCA) <http://www.nrca.net/>. If the roof has a warranty be sure to review terms and conduct proper inspections/repairs as needed to keep warranty in force.

**Useful Life:**

30 years

**Remaining Life:**

19 years

**Lower Estimate:**

\$ 1,350

**Higher Estimate:**

\$ 1,650

**Cost Source:** ARI Cost Database: Similar Project Cost History

**Comp #: 23602 Mailbox Roof – Replace (2021)****Approx Quantity: 120 GSF****Location:** Common Areas**Funded?:** Yes.**History:** Installed in ~2021.

**Comments:** Roofing consists of Pro Panel metal roof. Typically metal roofs are either Pro-Panel seamed roofs or Standing Seam roofs. Pro Panel roofs are installed with exposed metal screws and fasteners while Standing Seam will snap lock panels over the mechanical seam with no penetrations to the underlayment. Advantages of metal roofs include long life expectancies with relatively low need to repair. Metal roofing is typically a long-lived component assuming it was properly installed and is properly maintained. As routine maintenance many manufacturers recommend inspections at least twice annually (once in the fall before the rainy season and again in the spring) and after large storm events. Promptly replace any damaged/missing sections or conduct any other repair needed to ensure waterproof integrity of roof. We recommend having roof inspected in greater detail (including conditions of sub-surface materials) by an independent roofing consultant prior to replacement. There is a wealth of information available through organizations such as the Roof Consultant Institute <http://www.rci-online.org> and the National Roofing Contractors client (NRCA) <http://www.nrca.net/>. If the roof has a warranty be sure to review terms and conduct proper inspections/repairs as needed to keep warranty in force.

**Useful Life:**

30 years

**Remaining Life:**

25 years

**Lower Estimate:**

\$ 1,350

**Higher Estimate:**

\$ 1,650

**Cost Source:** ARI Cost Database: Similar Project Cost History

## Mechanical

**Comp #: 25570 Irrigation Clocks - Replace****Approx Quantity: 27 Controllers****Location:** Common Areas**Funded?:** Yes.**History:**

**Comments:** Minimal or no subjective/aesthetic value for this component. Useful life is based primarily on normal expectations for service/performance life in this location. Unless otherwise noted remaining useful life expectancy is based primarily on original installation or last replacement/purchase date our experience with similar systems/components and assuming normal amount of usage and good preventive maintenance. Irrigation controllers should have a relatively long life expectancy under normal circumstances. Replacement is often required due to lack of available replacement parts lightning strikes etc. as opposed to complete failure of existing equipment. Exposure to the elements can affect overall life expectancy and controllers should be located in protected areas or within protective enclosures whenever possible. When evaluating replacement options the client should consider replacement with smart" models (i.e. respond to projected weather data) to minimize unnecessary water usage. Payback period for efficient controllers that minimize water use is typically very short

**Useful Life:**  
15 years

**Remaining Life:**  
10 years

**Lower Estimate:**

\$ 12,200

**Higher Estimate:**

\$ 14,900

**Cost Source:** Research with Local Vendor/Contractor